

Wi-Fi QUICK STAR GUIDE

1 Wi-Fi / MJRCLOUD SET UP

. Even though this feature is not required we strongly recommend taking advantage of this **FREE Cloud base option.**



2 SET PROGRAMMING

If you decide to connect this clock to your company Wi-Fi prepare the following.

- **Wi-Fi Name**
- **Wi-Fi Password**
- **Smart Phone**


3 SET UP THE CLOK

Make sure the clock is powered UP

- **Remove the Top Cover**



- **Press the WiFi button for few seconds.**

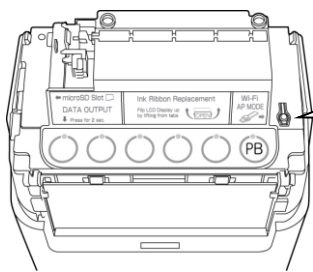

Wi-Fi button

- **The display will show**




NOTE;
The **TOP COVER** needs to be removed to Set up the Wi-Fi, when Wi-Fi is set up you Need to install the **TOP COVER** back on for Normal use (after step5), you should see the **Wi-Fi Symbol**




4 Use a SMART PHONE

- **Open the WiFi Connection screen**
- **Select the "MJR-PLUS_MJRXXXXXX"**
- **Enter this psssword **abcdef1234567****
- **Press JOIN**

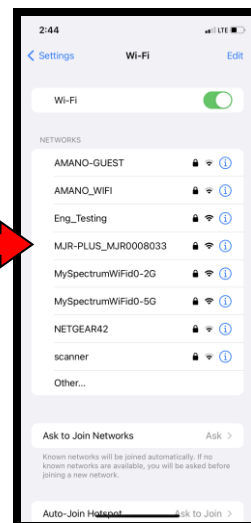


This (default) password is needed only for the first time you connect to the clock.

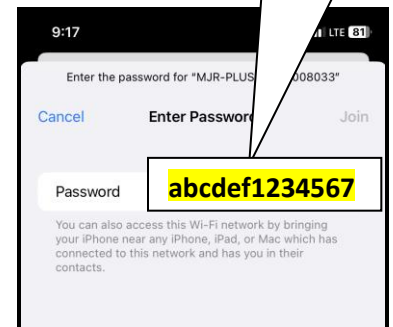


- **Enter this User Name = **user****
- **Enter this Password = **userpass****
- **Click "LOGING"**

Note: If you don't see the screen below immediately. Go to your browser and enter **192.168.1.1**

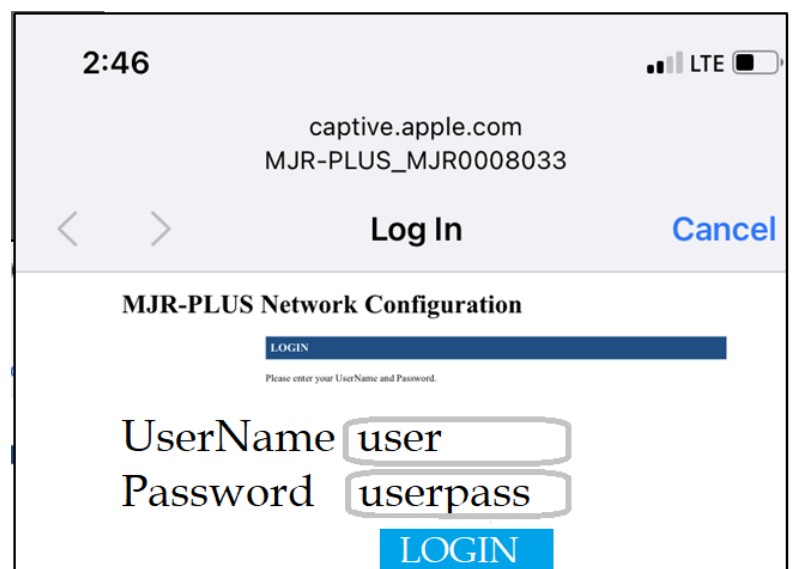

5 NETWORK SETTING

1. Click on the "Wi-Fi SETTING"
2. Enter your Wi-Fi name on the "SSID" field
3. Enter the Wi-Fi password on the "KEY" field
4. Click on REGISTER field.
5. Done, when success registration is complete you can exit

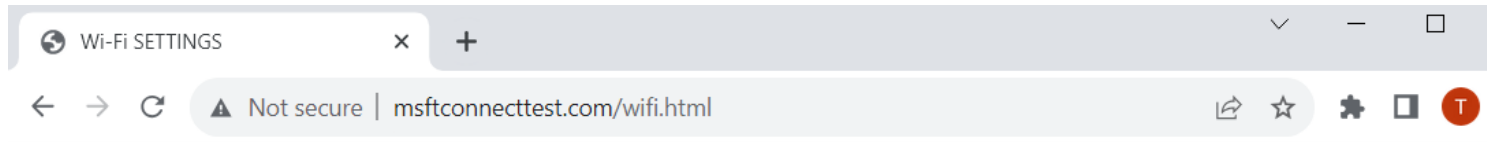

MJR-PLUS Network Configuration

1

TOP
 Wi-Fi Settings
 IP Address Settings
 Interface Information
 Client Information Settings
 Server Information Settings

Wi-Fi Settings

Set up Wi-Fi information.

Wireless Client (Station) Information

SSID:

KEY:

11n mode: OFF ON

Before setting up MJR-PLUS Wi-Fi, please complete Time Clocks registration

Access Point (Master) Information

SSID: (unchangeable)

KEY:

channel: (1-11)

If you change [Access Point (Master) Information], you will not be able to connect to the network.
To continue, exit the browser and reconnect with the device.


2 = Your company WiFi Name

3 = Your company WiFi password


4 = When you are Registered you are done.

6 CLOUD SITE

1. Scan the code or go to the website

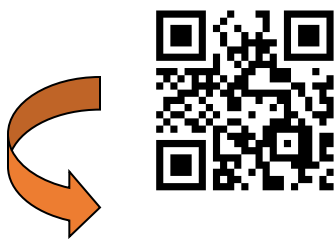


www.mjrccloud.com

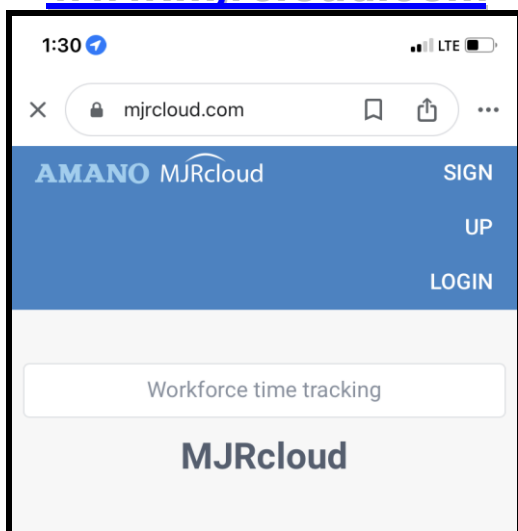

7 CLOUD SIGN IN & CLOCK REGISTRATION

- Click "SIGN" and enter your credentials.

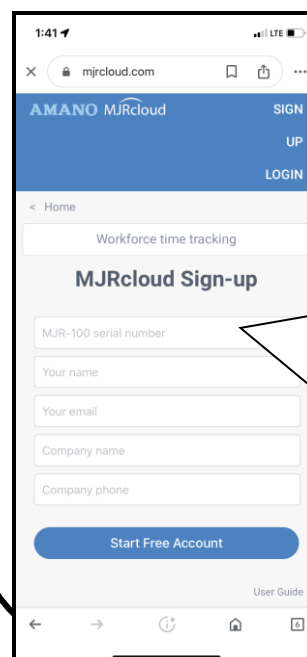

The Serial number is located on the Left side of the clock enter the Alpha numeric number:

EX:
MJR1234567